



Multi-function Products

Multi-band

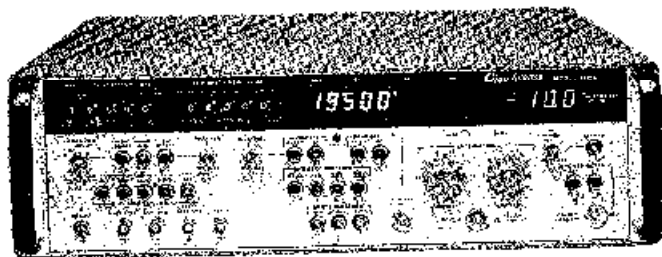

RF/Microwave Model 1026

Multi-band

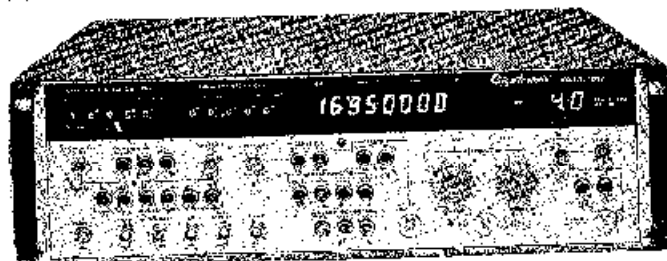

RF/Microwave Model 1018

Stimulus, frequency measurement and power measurement instruments are the most important and commonly used tools for R & D, production test, maintenance and calibration applications. In applications involving RF and microwave frequencies, the stimulus instrument is a signal generator or sweeper, the frequency measurement instrument is a counter or spectrum analyzer and the power measurement instrument is a power meter or scalar network analyzer. The choice of instrument in each category is normally dependent on the type of device being developed, tested, maintained or calibrated, the complexity of tests to be performed and the resources available for purchasing test equipment.

Giga-tronics multi-function products provide the convenience and economy of three instruments (signal generator, frequency counter and power meter) in one general purpose package costing very little more than the signal generator alone.

The signal generators contained in Giga-tronics multi-function products are multi-band synthesized instruments with full range, high resolution control of output power and both internal and external modulation capability; the same capabilities found in the Giga-tronics Series 900 Multi-band Signal Generators.

A microprocessor controlled two-loop indirect synthesizer produces accurate, stable, high resolution frequencies over the range of 2 to 26GHz, using four fundamental YIG-tuned output oscillators in bands of 2 to 8, 8 to 12, 12 to 18 and 18 to 26GHz. No frequency multipliers are used. The 2 to 8 and 8 to 12GHz bands downconvert to provide output frequencies below 2GHz. Harmonics are filtered within each band. Each output oscillator is phase-locked to a high stability

crystal time base to provide the most accurate, stable, spectrally pure frequencies available from any RF or microwave signal source.

Specially designed signal control modules, in which amplitude and pulse modulation are controlled, combine with a precision output attenuator and permanent internal storage of correction factors to provide precise control of output power levels from +10 to -119dBm with 0.1dB resolution.

Operating in their frequency counter mode, Giga-tronics multi-function instruments utilize the synthesized frequencies produced by the signal generator as the local oscillator for a completely automatic RF and microwave frequency counter. The counter is capable of measuring any unknown frequency within the instrument's frequency range, be they CW frequencies or pulse modulated frequencies with pulse widths as narrow as 100nsec. The unknown frequency may be displayed as a direct readout of the frequency itself or the frequency by which it differs from a pre-selected reference frequency. The accuracy of the frequency measurements is the same as the instrument's crystal controlled time base and measurement resolution is 100Hz. In the direct measurement mode, 10Hz in the offset measurement mode.

The external power measurement capability of Giga-tronics multi-function instruments is provided by a wide frequency range (50MHz to 26GHz) crystal detector that allows accurate CW power measurement over a range of -30dBm to +10dBm, independent of whether the instrument is operating in the frequency generation or measurement mode.

The Giga-tronics extras further confirm your decision to select a Giga-tronics multi-function instrument as the answer to your

signal generation, frequency measurement and power measurement requirements.

The signal generator features two modes of **digital sweep** capability. In the digitally controlled, unlocked mode, the synthesizer's reference loop is disabled and the microprocessor, controlling a digital to analog converter, moves each YIG-tuned output oscillator through its frequency range in pre-selected increments at rates as fast as 1msec/increment. In the digitally controlled step and lock mode, the synthesizer's reference loop remains active and acquires a lock at each incremental frequency before stepping on to the next. Sweep rates, variable from approximately 10msec/increment to 10sec/increment, provide sufficient time to observe, adjust or record test results at precise frequencies throughout the sweep range. In either digital sweep mode, step increments of 1, 10 or 100MHz can be set from the instrument's front panel (any increment within the instrument's frequency resolution via the IEEE 488 bus).

Since the external power meter operates independently of signal generation and frequency measurement, it can make **simultaneous frequency and power measurements** or directly read and **display power difference (gain or loss)** between the signal generator's output and any output of the device being tested. And, the external power meter, in conjunction with the signal generator's digital sweep and memory storage, provides **automatic cable calibration** and compensation for losses in the output cable being used.


Economy. What could be more economical than an RF/Microwave synthesized signal generator, CW and pulsed RF frequency counter and CW power meter for the price of the signal generator alone?

Multi-function Products — RF/Microwave

Series 1000

Features

- Synthesized Signal Generator
- .05 or 2 to 12, 18 or 26GHz
- 1MHz or 1kHz Resolution
- -10 to -119 dBm Output
- 0.1dB Resolution
- AM, FM, Pulse and Scan Modulation
- External Frequency Counter
- CW or Pulsed RF
- External Power Meter
- Output Cable Calibration
- IEEE 488 GPIB

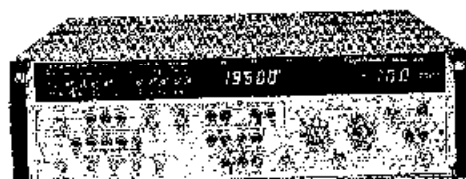

Model 1026

Giga-tronics produces two general purpose, multi-band, multi-function, products; the Model 1026 and the Model 1018. Each is a multi band, synthesized, RF/microwave, CW and digitally swept signal generator. Each is a full range, automatic, RF/microwave, CW or pulsed RF frequency counter. Each is a wide range, RF/microwave, CW power meter.

Each of the instrument's generators generates accurate stable, spectrally pure frequencies with resolution of 1MHz or 1kHz, each produces high powered, leveled output signals with 0.1dB resolution and ± 1 dB accuracy to 18GHz (-2 dB above 18GHz) and each can be swept throughout its frequency range in a digitally controlled continuous, or step and lock mode.

To further enhance its full modulation capabilities, the scan modulator is optionally available in the Model 1018. Scan modulation provides digitally characterized, DC coupled scan or AC coupled amplitude modulation, to greater than 40dB depth, for complex simulation applications requiring independent and simultaneous control of pulse and amplitude modulation.

Each instrument can measure unknown, external RF and microwave frequencies, either CW or pulsed RF, and display them directly or as an offset from a predetermined reference. Measurement resolution is 100Hz for direct readings; 10-Hz for offset readings. Accuracy is the same as the instrument's time base.

The external power measurement capability

HP JHF VHF L											S C X Ku K Ka U V			TEST SETS			MULTI-BAND SOUR- CES See p. 24		SIG GENS See p. 18	SWEEP- ERS See p. 9	SINGLE BAND SOUR- CES See p. 26		SIG GENS See p. 18	SWEEP- ERS See p. 8	PASS EXTEND- ERS See p. 18			
RF											MICROWAVE			MILLIMETER			Frequency Range (GHz)											
01	05	2	6	8	10	12	16	25	33	40	50	60	75															
01 05 10 12 16 25 33 40 50 60 75																												
01 05 10 12 16 25 33 40 50 60 75																												
01 05 10 12 16 25 33 40 50 60 75																												
01 05 10 12 16 25 33 40 50 60 75																												
01 05 10 12 16 25 33 40 50 60 75																												
01 05 10 12 16 25 33 40 50 60 75																												
01 05 10 12 16 25 33 40 50 60 75																												
01 05 10 12 16 25 33 40 50 60 75																												
01 05 10 12 16 25 33 40 50 60 75																												
01 05 10 12 16 25 33 40 50 60 75																												
01 05 10 12 16 25 33 40 50 60 75																												
01 05 10 12 16 25 33 40 50 60 75																												
01 05 10 12 16 25 33 40 50 60 75																												
01 05 10 12 16 25 33 40 50 60 75																												
01 05 10 12 16 25 33 40 50 60 75																												
01 05 10 12 16 25 33 40 50 60 75																												
01 05 10 12 16 25 33 40 50 60 75																												
01 05 10 12 16 25 33 40 50 60 75																												
01 05 10 12 16 25 33 40 50 60 75																												
01 05 10 12 16 25 33 40 50 60 75																												
01 05 10 12 16 25 33 40 50 60 75																												
01 05 10 12 16 25 33 40 50 60 75																												
01 05 10 12 16 25 33 40 50 60 75																												
01 05 10 12 16 25 33 40 50 60 75																												
01 05 10 12 16 25 33 40 50 60 75																												
01 05 10 12 16 25 33 40 50 60 75																												
01 05 10 12 16 25 33 40 50 60 75																												
01 05 10 12 16 25 33 40 50 60 75																												
01 05 10 12 16 25 33 40 50 60 75																												
01 05 10 12 16 25 33 40 50 60 75																												
01 05 10 12 16 25 33 40 50 60 75																												
01 05 10 12 16 25 33 40 50 60 75																												
01 05 10 12 16 25 33 40 50 60 75																												
01 05 10 12 16 25 33 40 50 60 75																												
01 05 10 12 16 25 33 40 50 60 75																												
01 05 10 12 16 25 33 40 50 60 75																												
01 05 10 12 16 25 33 40 50 60 75																												
01 05 10 12 16 25 33 40 50 60 75																												
01 05 10 12 16 25 33 40 50 60 75																												
01 05 10 12 16 25 33 40 50 60 75																												
01 05 10 12 16 25 33 40 50 60 75																												
01 05 10 12 16 25 33 40 50 60 75																												
01 05 10 12 16 25 33 40 50 60 75																												
01 05 10 12 16 25 33 40 50 60 75																												
01 05 10 12 16 25 33 40 50 60 75																												
01 05 10 12 16 25 33 40 50 60 75																												
01 05 10 12 16 25 33 40 50 60 75																												
01 05 10 12 16 25 33 40 50 60 75																												
01 05 10 12 16 25 33 40 50 60 75																												
01 05 10 12 16 25 33 40 50 60 75																												
01 05 10 12 16 25 33 40 50 60 75																												
01 05 10 12 16 25 33 40 50 60 75																												
01 05 10 																												

of the Models 1026 and 1018 provides a good power meter for general purpose measurements. It also adds two important signal generator features that are unique to Giga-tronics instruments. With the signal generator output connected to a UUT and the UUT's output connected to the power meter, the instrument's power display will directly indicate power difference (gain or loss) between the UUT's input and output.

The same capability can calibrate the output cable being used. Connect the cable from the signal generator's output directly to the power meter input. The signal generator will sweep once through its frequency range, store cable loss information in memory and, thereafter, automatically correct its output power to compensate for cable loss at any frequency and deliver calibrated, leveled power directly at the load.

For more detailed information...



Series 900/1000 brochure
No. 4 on Information Request Card

Specifications & Operating Performance

MODEL NUMBER

1018, 1026

SIGNAL GENERATOR SPECIFICATIONS

FREQUENCY CHARACTERISTICS

Range (GHz):

Model 1018: 0.5 to 26 GHz
 Model 1026: 0.5 to 26 GHz

0.5 2 8 12 18 26

Note: Option 02 deletes all frequencies below 20GHz, either model.

Option 12 deletes all frequencies above 12GHz, either model.

Option 18 deletes all frequencies above 18GHz, Model 1026.

Resolution: 1MHz (1kHz with Option 03)

Settable Frequency Parameters:

All CW frequencies

Sweep start (F1) and sweep stop (F2)

CW Operation

Frequency Accuracy: Same as time base

Frequency Stability: Same as time base

Time Base (Internal): 10MHz, $<1 \times 10^{-6}$ /year

($<1 \times 10^{-6}$ /day with Option 06)

Time Base (External): 10MHz $\pm 1 \times 10^{-6}$ or

better (5MHz with Option 11)

Time Base Output: Buffered 10MHz, derived

from internal or external time base

Digital Sweep Operation

Sweep Method: Continuous unlocked or stop and lock

Sweep Mode and Limits

Start/Stop Sweep: F1 to F2; Minimum frequency $\leq$ F1 $<$ F2 $<$ maximum frequency

Sweep Functions: Automatic recycle, single

sweep, single step and triggered single

sweep or single step

Step Size: 1, 10 or 100MHz via the front panel; any increment within the instrument's resolution via the IEEE 488 bus

Sweep Time: Approx 1 msec/step to

1 sec/step (continuous unlocked method); approx 10 msec/step to 10 sec/step (stop and lock method)

Pen Lift Output: TTL low during retrace

Sweep Sync Trigger In: TTL low to initiate

Sweep Output: 0 to +10V, proportional to frequency between set limits

SPECTRAL PURITY

Harmonics, Subharmonics: <-55 dBc

Spurious (Nonharmonics): <-55 dBc

Power Line/Fun Related: <-55 dBc

(>600 Hz offset), <-45 dBc (100Hz-600Hz offset), <-35 dBc (<100 Hz offset)

SWR Phase Noise (dBc/Hz Noise BW, CW mode)

Frequency Band (GHz)	100Hz	1kHz	10kHz	100kHz
0.5-2	-70	-72	-73	-97
2-8	-78	-80	-78	-102
8-12	-75	-77	-75	-100
12-18	-73	-74	-75	-95
18-26	-70	-70	-75	-95

OUTPUT CHARACTERISTICS

Maximum Levelled Output

Model 1018: +30dBm (+18dBm with Option 08)

Model 1026: +5dBm (+10dBm with Option 10)

Attenuation Range 0 to 119dB, Model 1018; 0 to 99dB, Model 1026

Variable Level Adjustment Range: 20dB

Resolution: 0.1dB

Accuracy: ± 1 dB (to 18GHz), ± 2 dB (18 to 26GHz)

Flatness: Included in accuracy

MODULATION CHARACTERISTICS

Pulse/Square Wave Modulation (PM)

Repetition Rate: Internal: 100Hz to 50kHz; external: 10Hz to 1MHz

Pulse Width: Internal: 0.1 to 10 μ sec;

external: 0.1 μ sec to 100msec

On/Off Ratio: >60 dB, Model 1018; >30 dB, Model 1026

Rise/Fall Times: <25 nsec

Overshoot, Undershoot and Ringing: $< \pm 2$ dB

Settling Time (to within ± 1 dB): ≤ 100 nsec

Sync Output: Modulation waveform

Amplitude Modulation (AM)

(Model 1018 only. Also see Scan Modulation, Option 07 Technical Bulletin)

Frequency Response (3dB points referenced 1kHz): 10Hz to 5kHz

Modulation Depth: 0 to $>82\%$

Input Required: 1V, p-p, for 50% modulation at 1kHz rate

Frequency Modulation — Option 15

(Model 1018 only)

Rate: 10Hz to 1MHz

Deviation: 20MHz, 9-p

Sensitivity: 3V, peak, for max deviation

Distortion: $<5\%$ at 1MHz peak deviation and 100kHz rate

Incidental AM: $<3\%$

FREQUENCY COUNTER SPECIFICATIONS

Measurement Characteristics

Mode: CW or pulsed RF

Method: Direct or offset (Δf)

Range: 100MHz to 18GHz, Model 1018; 100MHz to 26GHz, Model 1026

Resolution: 100Hz, direct; 10Hz, offset

Sensitivity: >30 dBm, 0.1 to 80Hz

>25 dBm, 8 to 18GHz; >-18 dBm, 18 to 26GHz

Time Base: Same as signal generator

Offset Range: ± 500 MHz

POWER METER SPECIFICATIONS

Measurement Characteristics

Mode: Average CW

Method: Direct or referenced to signal generator output (ΔP)

Range: 50MHz to 26GHz

External Power Measurement Range: -30 to +10dBm

Resolution: 0.1dB

Accuracy: ± 1 dB (-10 to +10dBm), ± 2 dB (-30 to +10dBm)

Power Meter Output: 0.5V $\pm 10\%$ /dBm (+10V $\pm 10\%$ at +10dBm and -10V $\pm 10\%$ at -30dBm)

GENERAL INFORMATION AND OPTIONS

Remote Interface: IEEE STD 488-1978 (RS-232 with Option 04)

Environmental: Complies with MIL-STD-28800C, Type III, Class S, Style E

Automatic Output Cable Calibration (See Technical Bulletin 09)

Frequency Extender Interface — Option 14

Rear Panel RF Output Connector — Option 22

Type N RF Output Connector (Instruments to 18GHz) — Option 23

Series
1000

Technical Bulletin		
Information Request	Card No.	
Technical Bulletin No.		
Option		
Scan Modulation	07	8
High Output Power	08	9
Cable Calibration	09	10
High Output Power	10	11
External FM	15	12
Past Scan Modulation	17	13

Option No.

Technical drawing of a mechanical part, likely a piston or cylinder head, showing multiple views (top, side, cross-sections) and a detailed grid of dimensions and tolerances. The drawing includes a title block with text in Chinese and English, and a large table of dimensions and tolerances at the bottom.

Dimensions and Tolerances Table:

Dimension	Tolerance	Material	Notes
1	±0.05	Aluminum	
2	±0.05	Aluminum	
3	±0.05	Aluminum	
4	±0.05	Aluminum	
5	±0.05	Aluminum	
6	±0.05	Aluminum	
7	±0.05	Aluminum	
8	±0.05	Aluminum	
9	±0.05	Aluminum	
10	±0.05	Aluminum	
11	±0.05	Aluminum	
12	±0.05	Aluminum	
13	±0.05	Aluminum	
14	±0.05	Aluminum	
15	±0.05	Aluminum	
16	±0.05	Aluminum	
17	±0.05	Aluminum	
18	±0.05	Aluminum	
19	±0.05	Aluminum	
20	±0.05	Aluminum	
21	±0.05	Aluminum	
22	±0.05	Aluminum	
23	±0.05	Aluminum	
24	±0.05	Aluminum	
25	±0.05	Aluminum	
26	±0.05	Aluminum	
27	±0.05	Aluminum	
28	±0.05	Aluminum	
29	±0.05	Aluminum	
30	±0.05	Aluminum	
31	±0.05	Aluminum	
32	±0.05	Aluminum	
33	±0.05	Aluminum	
34	±0.05	Aluminum	
35	±0.05	Aluminum	
36	±0.05	Aluminum	
37	±0.05	Aluminum	
38	±0.05	Aluminum	
39	±0.05	Aluminum	
40	±0.05	Aluminum	
41	±0.05	Aluminum	
42	±0.05	Aluminum	
43	±0.05	Aluminum	
44	±0.05	Aluminum	
45	±0.05	Aluminum	
46	±0.05	Aluminum	
47	±0.05	Aluminum	
48	±0.05	Aluminum	
49	±0.05	Aluminum	
50	±0.05	Aluminum	
51	±0.05	Aluminum	
52	±0.05	Aluminum	
53	±0.05	Aluminum	
54	±0.05	Aluminum	
55	±0.05	Aluminum	
56	±0.05	Aluminum	
57	±0.05	Aluminum	
58	±0.05	Aluminum	
59	±0.05	Aluminum	
60	±0.05	Aluminum	
61	±0.05	Aluminum	
62	±0.05	Aluminum	
63	±0.05	Aluminum	
64	±0.05	Aluminum	
65	±0.05	Aluminum	
66	±0.05	Aluminum	
67	±0.05	Aluminum	
68	±0.05	Aluminum	
69	±0.05	Aluminum	
70	±0.05	Aluminum	
71	±0.05	Aluminum	
72	±0.05	Aluminum	
73	±0.05	Aluminum	
74	±0.05	Aluminum	
75	±0.05	Aluminum	
76	±0.05	Aluminum	
77	±0.05	Aluminum	
78	±0.05	Aluminum	
79	±0.05	Aluminum	
80	±0.05	Aluminum	
81	±0.05	Aluminum	
82	±0.05	Aluminum	
83	±0.05	Aluminum	
84	±0.05	Aluminum	
85	±0.05	Aluminum	
86	±0.05	Aluminum	
87	±0.05	Aluminum	
88	±0.05	Aluminum	
89	±0.05	Aluminum	
90	±0.05	Aluminum	
91	±0.05	Aluminum	
92	±0.05	Aluminum	
93	±0.05	Aluminum	
94	±0.05	Aluminum	
95	±0.05	Aluminum	
96	±0.05	Aluminum	
97	±0.05	Aluminum	
98	±0.05	Aluminum	
99	±0.05	Aluminum	
100	±0.05	Aluminum	