


Keysight Technologies

6000 Series Oscilloscopes

Lab Scope Performance at a Portable Scope Price


Data Sheet

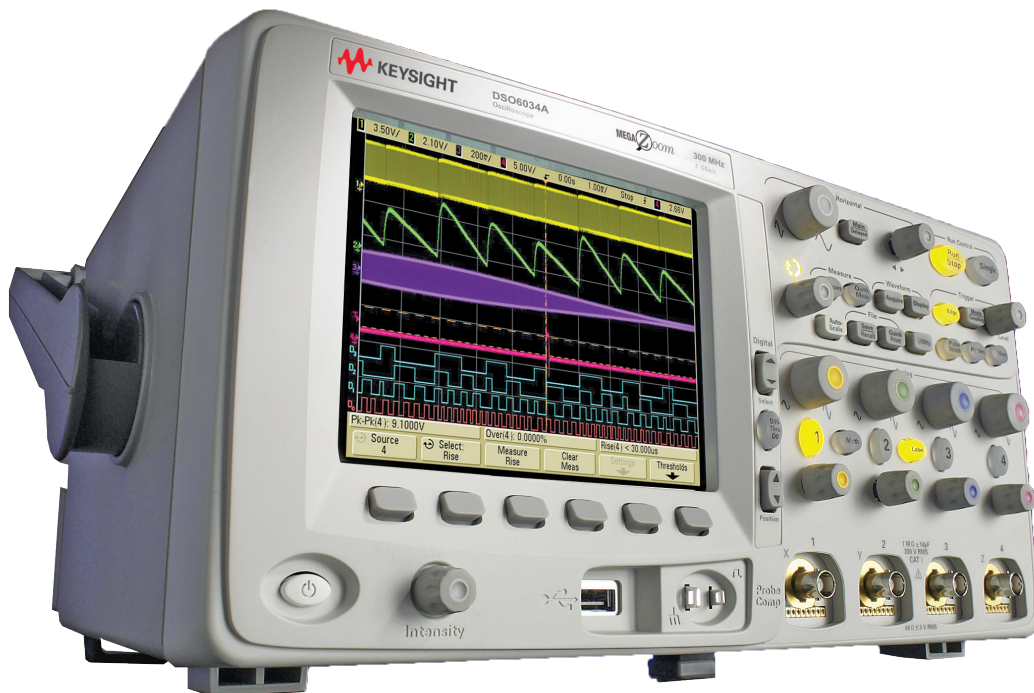

Introduction

The standard for high-performance portable scopes

A wide selection lets you choose the 6000 Series model that best matches your needs

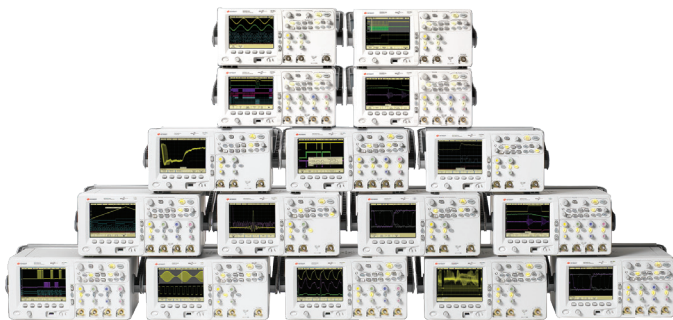

Bring your toughest problems into focus with the right combination of features and performance

If you work with analog, digital and serial circuitry, Keysight Technologies, Inc. 6000 Series oscilloscopes give you the tools you need for the fastest debug of your design.

Mixed signal oscilloscope (MSO) models and the traditional 2- and 4-channel digital storage oscilloscope (DSO) models are optimized with the capabilities you need for verifying and debugging designs that include embedded serial, microcontrollers, DSPs, FPGAs, ADCs and DACs.

Mixed analog and digital channel triggering and analysis

- See all aspects of your design in one box – analog, digital and serial
- Trigger across both slow analog and fast digital signals


Powerful applications suites available

- I²C, SPI and USB standard triggering and decode
- CAN, LIN and FlexRay triggering and decode
- Rapid Xilinx and Altera FPGA debug

Get superior insight into your design challenges with integrated analog, digital and serial test.

The performance and problem solving tools you need to more quickly debug your analog, digital and serial design challenges, in a single instrument

- 100 MHz, 300 MHz, 500 MHz and 1 GHz bandwidths
- 2 or 4 analog channels
- Optional 16 digital channels
- MegaZoom III memory and display technology
 - Up to 8 Mpts acquisition memory
 - Up to 100,000 waveforms per second real-time update rate
 - High-definition XGA (1024 x 768) display with 256 levels of intensity grading
- Up to 12 bits of vertical resolution, even in single-shot acquisitions
- Complete connectivity – standard
 - USB (3 ports)
 - LAN
 - GPIB
 - XGA display out
 - Full remote control, including web browser
 - LXI Class C compliant
- Secure environment option
- Battery option

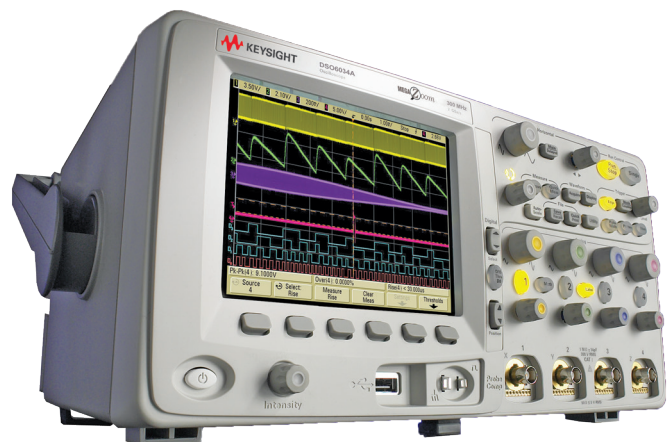


Your Design Has Analog, Digital and Serial Signals, Shouldn't Your Scope?

Analog: Up to 1 GHz bandwidth and up to 4 GSa/s sample rate

The 6000 Series analog channels provide faster identification of the most elusive problems.


- Revolutionary high-resolution display. Engineered with a XGA display and 256 levels of intensity (color grading), see a precise representation of the analog characteristics of the signals you're testing. Equipped with the industry's fastest update rate at 100,000 waveform/s update rate, you'll capture and see infrequent events.
- MegaZoom III technology. MegaZoom III responsive deep memory captures long, non-repeating signals and maintains high sample rates, allowing you to quickly zoom in on areas of interest. Sample rate and memory depth go hand-in-hand. Deep memory in oscilloscopes sustains a high sample rate over longer time spans.

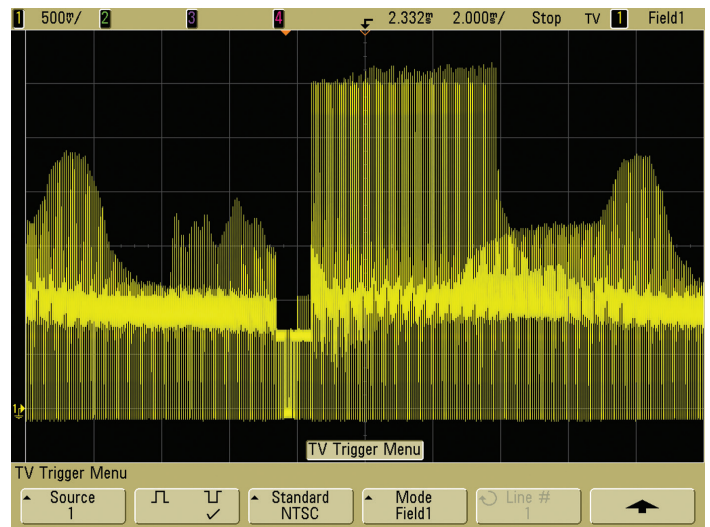

Digital: 16 digital timing channels with mixed signal triggering

Capture a mix of analog or digital signals. Compare multiple cycles of digital signals with slower analog signals.


- 16 high-speed timing with up to 2 GSa/s deep memory timing. Use the timing channels to evaluate control signal relationship. Or capture and view data buses up to 16 bits wide. Display individual signals or bus waveforms in hex or binary.
- Mixed signal trigger. Trigger across any combination of analog and digital signals simultaneously. See precise analog measurements timed with exact digital content, all in one box.
- Applications for digital channels. Designing with Altera or Xilinx FPGAs? Use FPGA dynamic probe for rapid internal FPGA measurements. Using I²C or SPI? Use the digital signals from a 4-channel MSO to acquire and decode these serial buses.

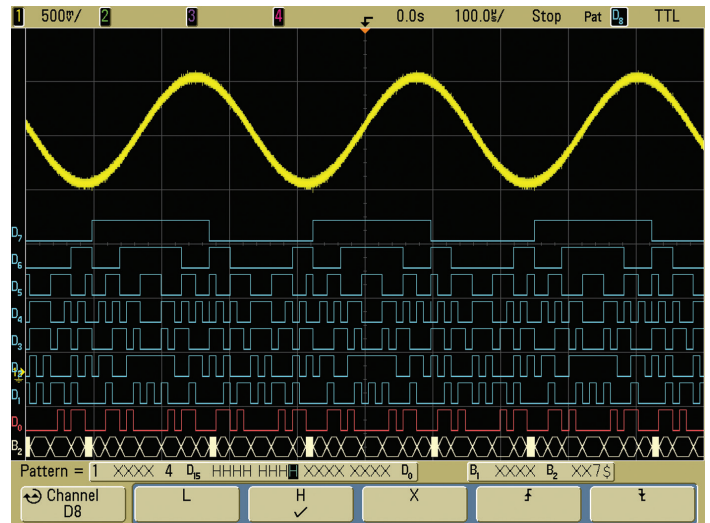

Serial: Hardware-accelerated decode and trigger for I²C, SPI, CAN, LIN and FlexRay

Capture long streams of serial data and gain fast insight into the problem. The Keysight 6000 Series oscilloscopes provide the best serial capabilities in its class.

- Serial bus triggering and decoding. Display responsive, on-screen decode of serial bus traffic. Isolate specific events with pinpoint accuracy. Show decode to validate serial bus activity in real-time.
- Hijack infrequent errors. Hardware-accelerated decoding increases your probability of capturing elusive events. Keysight oscilloscopes can help you catch that intermittent problem before it becomes an intermittent customer complaint or quality concern.
- Easily capture enough serial data to see all of the details. Use deep memory to capture serial data stream over a long period of time.

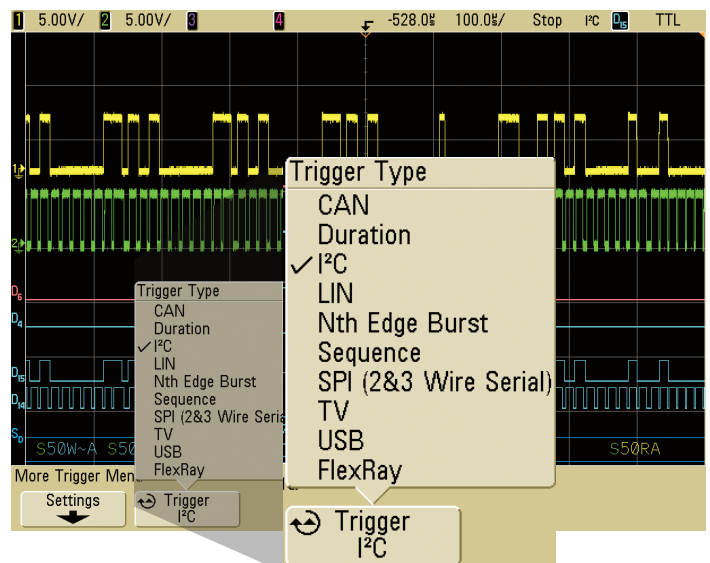

If You Haven't Purchased a Keysight Oscilloscope Lately, Why Should You Consider One Now?

Leading-edge technology

The 6000 Series oscilloscopes incorporate third generation MegaZoom III technology blocks – **responsive deep memory, fast update rates with minimal “dead time” and analog-like display systems** – and deliver them in a compact package.

Industry-leading customer support

As the world's leading Test and Measurement vendor, Keysight maintains the largest network of sales engineers, application engineers, support engineers and technicians. From pre-sales collaboration, to calibration, to training and consulting, to repair and servicing, Keysight stands with you throughout the life of your product. It's no accident that Keysight has such loyal customers.

Don't take our word for it

Compare the 6000 Series with your current bench scope. Or compare it to one of our competitors' newest scopes. You'll see why Keysight has been the **fastest-growing oscilloscope supplier** since 2001 (source: Prime Data 2005 Test Instrument Industry Service Market Share Analysis).

Model	Bandwidth	Maximum sample rate	Memory depth	Scope channels	Logic channels
DSO6012A	100 MHz	2 GSa/s	8 Mpts	2	
MSO6012A	100 MHz	2 GSa/s	8 Mpts	2	16
DSO6014A	100 MHz	2 GSa/s	8 Mpts	4	
MSO6014A	100 MHz	2 GSa/s	8 Mpts	4	16
DSO6032A	300 MHz	2 GSa/s	8 Mpts	2	
MSO6032A	300 MHz	2 GSa/s	8 Mpts	2	16
DSO6034A	300 MHz	2 GSa/s	8 Mpts	4	
MSO6034A	300 MHz	2 GSa/s	8 Mpts	4	16
DSO6052A	500 MHz	4 GSa/s	8 Mpts	2	
MSO6052A	500 MHz	4 GSa/s	8 Mpts	2	16
DSO6054A	500 MHz	4 GSa/s	8 Mpts	4	
MSO6054A	500 MHz	4 GSa/s	8 Mpts	4	16
DSO6102A	1 GHz	4 GSa/s	8 Mpts	2	
MSO6102A	1 GHz	4 GSa/s	8 Mpts	2	16
DSO6104A	1 GHz	4 GSa/s	8 Mpts	4	
MSO6104A	1 GHz	4 GSa/s	8 Mpts	4	16

Start with:

- DSO
- 2 Mpts standard memory depth

User installable
Upgrade in 10 minutes

Upgrade to:

- MSO
- 8 Mpts deep memory

Other Nice Features

High resolution mode

Offers up to 12 bits of vertical resolution in real-time, single-shot mode. This is accomplished by serially filtering sequential data points and mapping the filtered results to the display when operating at base settings greater than 10- μ s/div.

Help is at your fingertips

An embedded help system – available in six languages – gives you quick answers if you don't understand a feature. Simply press and hold the corresponding front-panel key, and a screen pops up to explain its function.

Waveform math with FFT

Analysis functions include subtract, multiply, integrate, and differentiate, as well as Fast Fourier Transforms (FFT).

Peak detect


250 ps on 500-MHz models, 500 ps on 300-MHz models and 1 ns on 100-MHz models helps you find narrow glitches.

AutoProbe interface


Automatically sets probe attenuation factors and provides power for selected Infiniium active probes, including the award-winning 1130A 1.5-GHz InfiniiMax differential active probe and 1156A 1.5-GHz single-ended active probe systems.

5-digit hardware counter

Measures frequency up to the bandwidth of the scope.

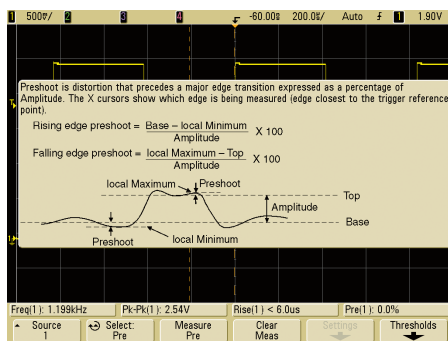

Press and hold a key for instant help.

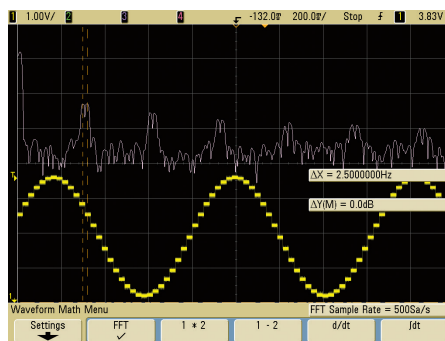

FFT allows you to view the spectral content of this unfiltered sine wave.

Trig out

Provides an easy way to synchronize your scope to other instruments. Use the Trig Out port to connect your scope to a frequency counter for more accurate frequency measurements or to cross trigger other instruments.

Autoscale

Displays all active signals, and automatically sets the vertical, horizontal and trigger controls.

23 automatic measurements

With QuickMeas Pressing [QuickMeas] brings up the last four measurements selected. Cursors automatically track the most recently selected measurement.

HDTV trigger


The 6000 Series supports analog HDTV/EDTV triggering for standards like 1080i, 1080p, 720p and 480p as well as standard video triggering on any line within a field, all lines, all fields, odd or even fields for NTSC, SECAM, PAL and PAL-M video signals.

Serial triggering

Set up a serial bus trigger for I²C, SPI and USB.

Easy software upgrades

System software is stored in Flash ROM that can be upgraded from the scope's built-in USB port or LAN. You can find the latest system and IntuiLink Data Capture software at www.keysight.com/find/MSO6000sw.

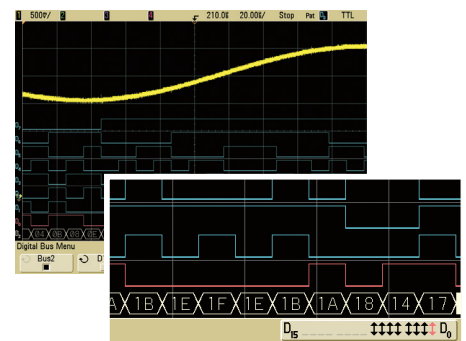

Display signals can be displayed individually or as overlayed bus values.

Why Does Deep Memory Matter?



See more time

This is the most easily understood use of deep memory. The more samples that you acquire, the more time that you can see at a particular sample rate.

Long capture times give you better visibility into cause-effect relationships in your design, which greatly simplifies root-cause debugging. It also allows you to capture start-up events (like the start-up sequence below) in a single acquisition.

You don't have to stitch together multiple acquisitions or set precise triggering conditions. Spend less time finding events, and more time analyzing them.


See more details

The relationship between memory depth and acquisition rate isn't as obvious. All scopes have a "banner" maximum sample rate specification, but many can only sustain these rates at a few timebase settings.

In the case of an oscilloscope with a 5 GSa/s acquisition rate and 10 k of memory, those 10,000 points can only fill 2 Ms of time. Since scopes have 10 time divisions, the sample rate drops at any time setting below 200 ns/div.

As a result, if you look at "slow/fast" events like a modulated signal, you run the risk of aliasing your signal. Or you may simply miss out on important signal details when you zoom in on it.

Deep memory oscilloscopes let you sustain a high sample rate over longer periods of time.

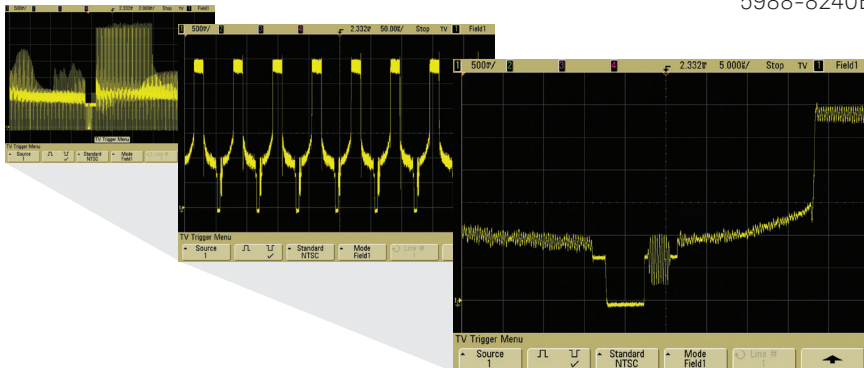


There is no better way to experience the superiority of the new Keysight 6000 Series scopes than seeing one in action on your bench to measure your signals yourself. We can arrange for you to try out a new MSO6000A MSO. Contact your nearest Keysight sales office or visit the MSO6000A home page at www.keysight.com/find/MSO6000. Contact Keysight today to request an evaluation.



Always fast, always on

MegaZoom III is the third generation of the fast and deep memory architecture that Keysight introduced in 1996. It's not a special mode, unlike other deep-memory oscilloscopes. You have access to your MegaZoom memory at all times. And the display will respond instantly to your commands as you scale the t/div settings or pan and zoom in the Delayed (or "zoom") window.

You can learn more about MegaZoom III deep memory in *Capturing Infrequent and Random Events Using Deep Memory Oscilloscopes* - Application Note (Publication number 5988-8240EN).

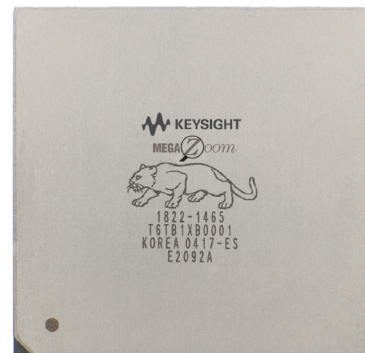

Why Does A Fast Update Rate Matter?


This is a question that we hear frequently. If the human eye has trouble discerning above 30-50 frames per second, **is there really a difference between 3,600 and 100,000 waveforms per second?** If you know what you're looking for the answer is probably "no". However, if you are hunting for unknown signal anomalies or characterizing jitter, the answer is "yes".

If you know that there is a **glitch in your system**, it's easy to capture it using a pulse-width trigger. However, if you are just browsing through your design, your chances of finding a glitch increase as the update rate increases. If a glitch occurs during the "dead time" between sample, you miss it. With MegaZoom III technology, the dead time is much smaller. A scope with a slower update rate will capture the glitch eventually (if it recurs), but most engineers and technicians don't have the time or patience to wait for their tools to catch up.

If you are **characterizing signal jitter**, a fast update rate gives you accurate results sooner. And when the fast update rate is combined with the 6000 Series' XGA high-definition display (1024 x 768, 256 intensity levels), subtle differences in these acquisitions become obvious.

And like all other aspects of MegaZoom III technology, this is a real-time acquisition mode. **It's always fast, always on.**

Learn more about the benefits of a fast update rate by reading *Oscilloscope Waveform Update Rate Determines Ability to Capture Elusive Events - Application Note* (Publication number 5989-7885EN).

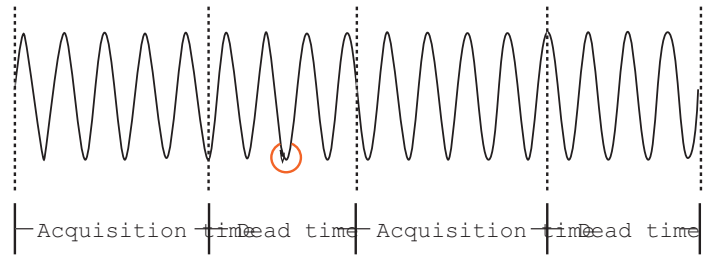

Reducing the dead time between acquisitions ...



... improves your chances of finding random events like glitches.

Connectivity

Our customers tell us that oscilloscope connectivity is an increasingly important feature of their test instruments. That's why the 6000 Series scopes come with the most comprehensive hardware and software connectivity tools in their class.

Hardware connectivity

Standard ports include:


- 2 x USB host ports (for external storage and printing devices), one on the front and one on the rear
- 1 x USB device port for high-speed PC connectivity
- 10/100 Mbit LAN for Internet/Intranet connectivity
- GPIB to allow easy migration into existing test systems
- XGA Out for external monitors and projectors

LXI Class C

LAN eXtensions for Instrumentation (LXI) is a standards-based architecture for test systems. By specifying the interaction of system components, LXI enables fast and efficient test system creation and reconfiguration. The 6000 Series oscilloscopes follow specified LAN protocols, and adhere to LXI requirements such as a built-in Web control server, I/O Library Suite, and easy-to-use SCPI commands. The standard Keysight I/O Library Suite makes it easy to configure and integrate instruments in your system.

IntuiLink toolbars

IntuiLink gives you a quick way to move screen shots and data into Microsoft Word and Excel. These toolbars can be installed from www.keysight.com/find/intuilink.

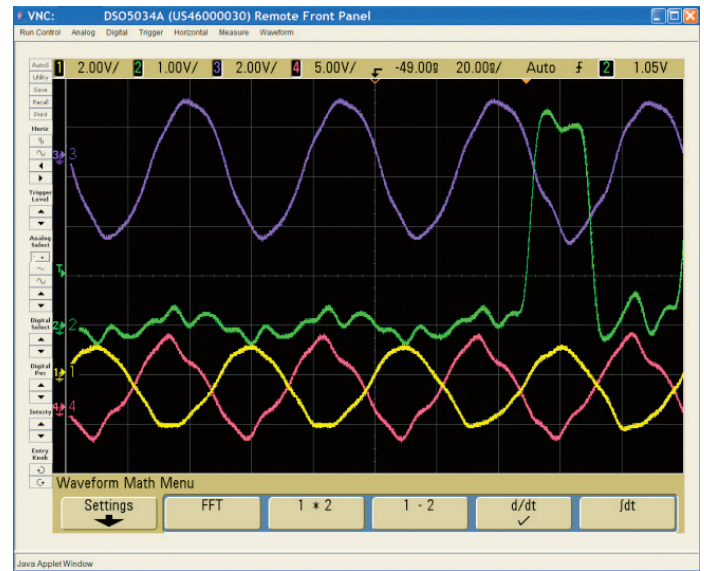


Keysight Remote Front Panel running in a web browser.


Scope View logic analyzer and oscilloscope correlation

Scope View enables simple time-correlated measurements between a 6000 Series oscilloscope and an Keysight 16800/900 logic analyzer. Scope and logic waveforms are integrated into a single logic analyzer waveform display for easy viewing analysis – all with a simple point-to-point LAN connection. You can also cross-trigger the instruments, automatically de-skew the waveforms, and maintain marker tracking between the instruments.

Rear panel inputs/outputs

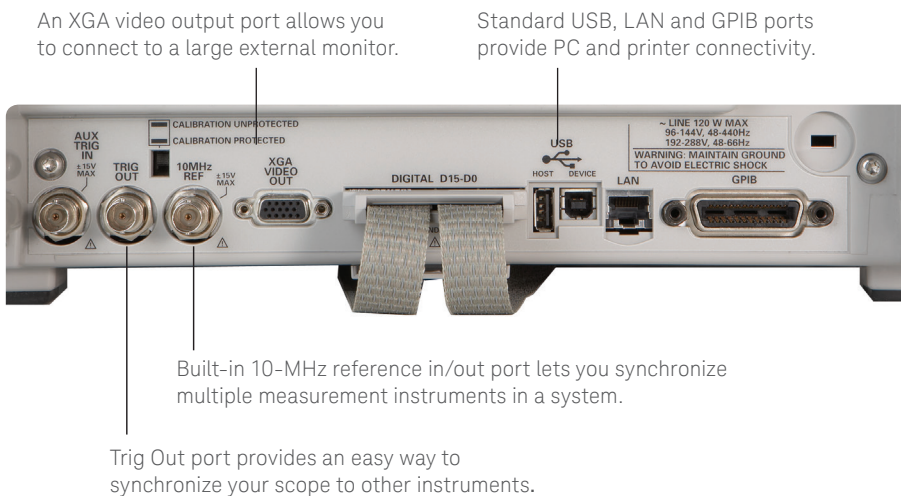


Make time-correlated measurements between an Keysight logic analyzer and 6000 Series oscilloscope

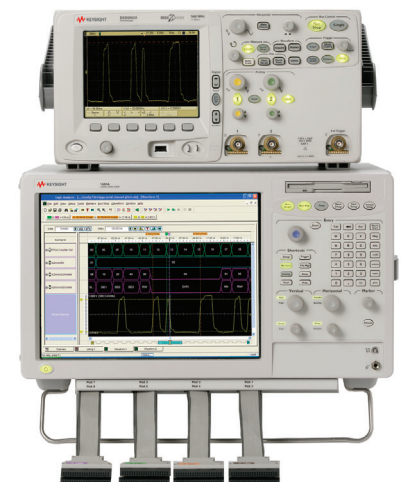

Probes and Accessories

Keysight offers a complete family of innovative passive and active probes for the 6000 Series scopes to get your job done easily. For more comprehensive information, refer to the *InfiniiVision Oscilloscope Probes and Accessories Data Sheet and Selection Guide* (Publication number 5968-8153EN/ENUS and/or 5989-6162EN. Or for more information please visit our web site at www.keysight.com/find/scopes_probes.

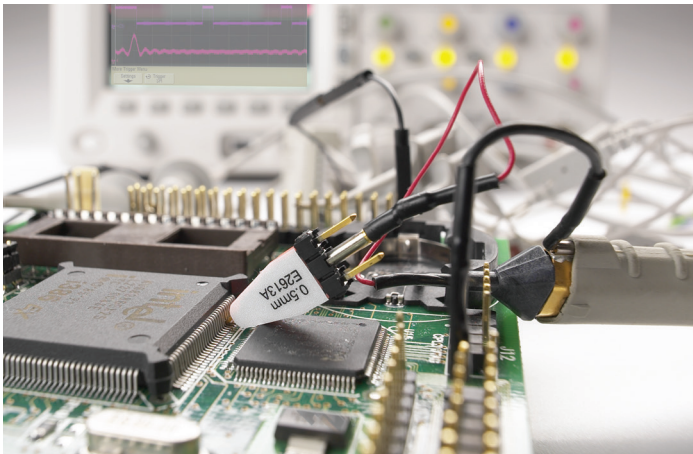

Selection guide

	10070C	10074C (shipped with 100 MHz models)	10073C (shipped with 300 MHz to 1 GHz models)	10076A high-voltage probe	N2771A high-voltage probe
Probe bandwidth	20 MHz	150 MHz	500 MHz	250 MHz	50 MHz
Probe rise time (calculated)	< 17.5 ns	< 2.33 ns	< 700 ps	< 1.4 ns	< 7 ns
Attenuation ratio	1:1	10:1	10:1	100:1	1000:1
Input resistance (when terminated into 1 MΩ)	1 MΩ	10 MΩ	2.2 MΩ	66.7 MΩ	100 MΩ
Input capacitance	Approx. 70 pF	Approx. 15 pF	Approx. 12 pF	Approx. 3 pF	Approx. 1 pF
Maximum input (dc+peak ac)	400 Vpk CAT I (mains isolated)	500 Vpk CAT I (mains isolated)	500 Vpk CAT I (mains isolated)	4000 Vpk	15 kV dc, 10 kVrms
	400 Vpk CAT II (post receptacle mains)	400 Vpk CAT II (post receptacle mains)	400 Vpk CAT II (post receptacle mains)		30 kV dc + peak ac
Compensation range	None	9-17 pF	6-15 pF	6-20 pF	7-25 pF
Probe sense	No	Yes	Yes	Yes	No

Note: These Infiniium active probes are not supported by 6000 Series 300 MHz to 1 GHz models – 1152A, 11 53A, 1 154A, 1 155A, 11 59A, 11 68A, and 11 69A. The 6000 Series 100 MHz models do not support any Keysight Infiniium active probes with AutoProbe interface.

Accessories

Options	Description
N2916A	Rackmount Kit
1180CZ	Testmobile scope cart
N2917A	Transit case
N2919A	Testmobile bracket for 1180CZ and 6000
10833A	GPIO cable, 1 m long
ABA	Printed users guide in English
ABJ	Printed users guide in Japanese
AB2	Printed users guide in simplified Chinese



Software Applications


FPGA dynamic probe (N5406A for Xilinx, N5434A for Altera)

Give your MSO internal FPGA visibility. Keysight's MSO FPGA dynamic probe provides internal FPGA visibility and quick instrument setup using an innovative core-assisted debug approach. Measurement tasks that previously took hours can be done in a few mouse clicks. In a few seconds, easily measure a different set of internal signals without changing your FPGA design.

For more information:

www.keysight.com/find/6000-altera

www.keysight.com/find/6000-xilinx

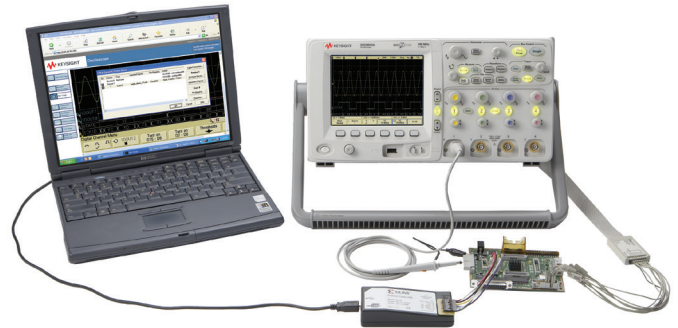

Debug and validate your FPGA designs faster and more effectively with FPGA dynamic probe and Keysight MSO.

Vector signal analysis

Expand the measurement capability of your 6000 Series scope with the 89601A vector signal analysis software. This advanced DSP based software takes the digitized signal data provided by the scope and provides FFT based spectrum analysis and wide bandwidth digital modulation analysis. Use these capabilities to demodulate wireless communication signals like WCDMA and cdma2000, and wireless networking signals like 802.11 WiFi and 802.16 WiMax. Take advantage of the super wide bandwidth of your scope to capture and evaluate radar signals.

For more information:

www.keysight.com/find/6000-vsa


I²C/SPI serial trigger and decode (N5423A or Option LSS on new scope purchases)

This application displays real-time time-aligned decode of I²C and SPI serial buses. Hardware-assisted triggering and decode provide the industries fastest throughput and update rate. Hardware-assisted triggering and decode guarantees you will never miss a trigger event or anomaly – unlike other scopes that have triggering dead time between acquisitions.

This application requires a 4-channel DSO or 4-channel MSO and can use any combination of the scope or logic acquisition channels.

For more information:

www.keysight.com/find/I2C-SPI

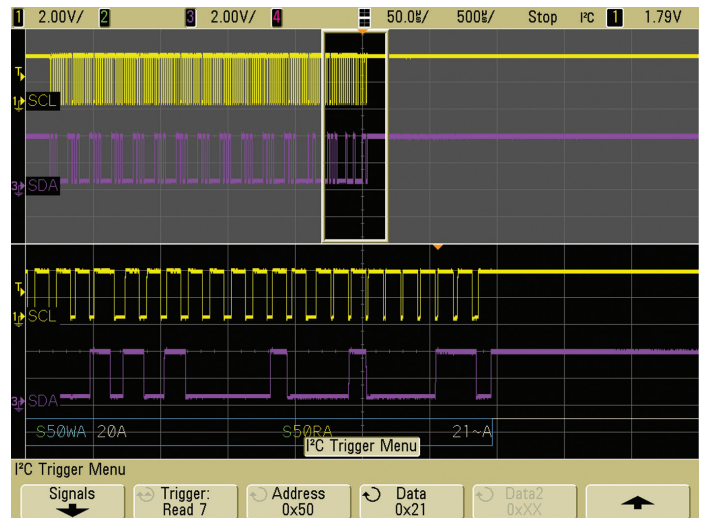

On-screen serial decode of an I²C packet.

Software Applications (Continued)


CAN/LIN triggering and decode (N5424A or Option AMS on new scope purchases)

Trigger on and decode serially transmitted data based on CAN and LIN protocols. This application not only provides triggering on complex serial signals, but also provides unique hardware-accelerated decode capabilities. Hardware-assisted triggering and decode guarantees you will never miss a trigger event or anomaly – unlike other scopes that have triggering dead time between acquisitions.

This application requires a 4-channel DSO or 4-channel MSO and can use any combination of scope or logic acquisition channels.

For more information:

www.keysight.com/find/CAN-LIN

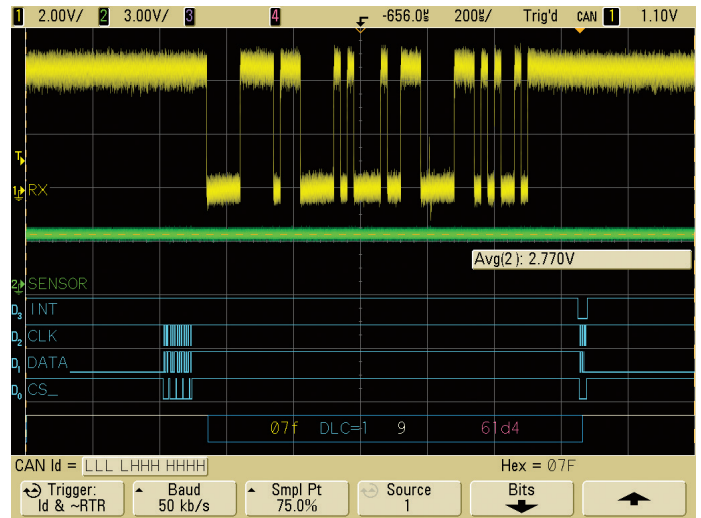


Random errors observed in CAN decode while triggering on data frame ID: 07FHEX.

FlexRay triggering and decode (N5432A or Option FRS on new scope purchases)

FlexRay protocol is based on time-triggered and deterministic architecture. Keysight's FlexRay solution for the 6000 Series mixed signal oscilloscopes offers a robust set of FlexRay frame, slot, and error triggering, including the ability to trigger on specific FlexRay communications qualified on base-cycle and cycle-repetition. This solution combines a Keysight 6000 Series mixed signal oscilloscope (MSO) with a DECOMSYS::BUSDOCTOR 2 protocol analyzer.

For more information:

www.keysight.com/find/flexray

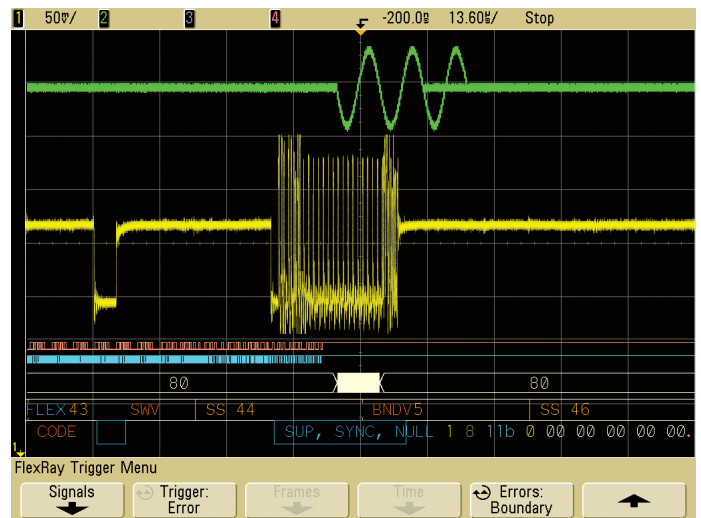

Mixed-signal measurements in a FlexRay system using an MSO.

Keysight 6000 Series Oscilloscopes: The Right Combination of Features and Performance to Bring your Toughest Analog, Digital and Serial Problems Into Focus


MegaZoom III deep memory helps you determine how your signals are impacting each other. With shallow memory scopes, you have to choose whether you look at a slow analog signal or fast digital content. With up to 8 Mpts deep memory, you don't have to choose – capture all of your data at once.

Revolutionary high-resolution color display with XGA resolution and 256 levels of intensity reveals subtle details that most scopes won't show you.


Built-in USB port makes it easy to save your work and update your system software quickly.

Intensity knob allows you to see the right level of waveform detail, just like an analog scope.

Free IntuiLink Data Capture PC software makes transferring waveform data or screen image to a PC fast and easy.

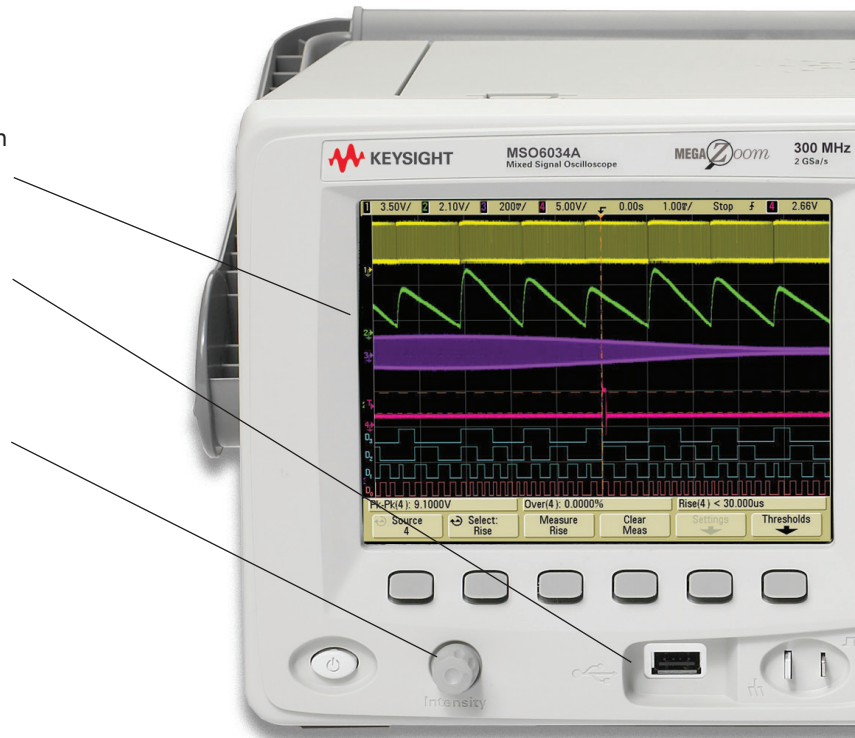

Built-in storage compartment allows you to store probes and power cord for easy access and transportation.

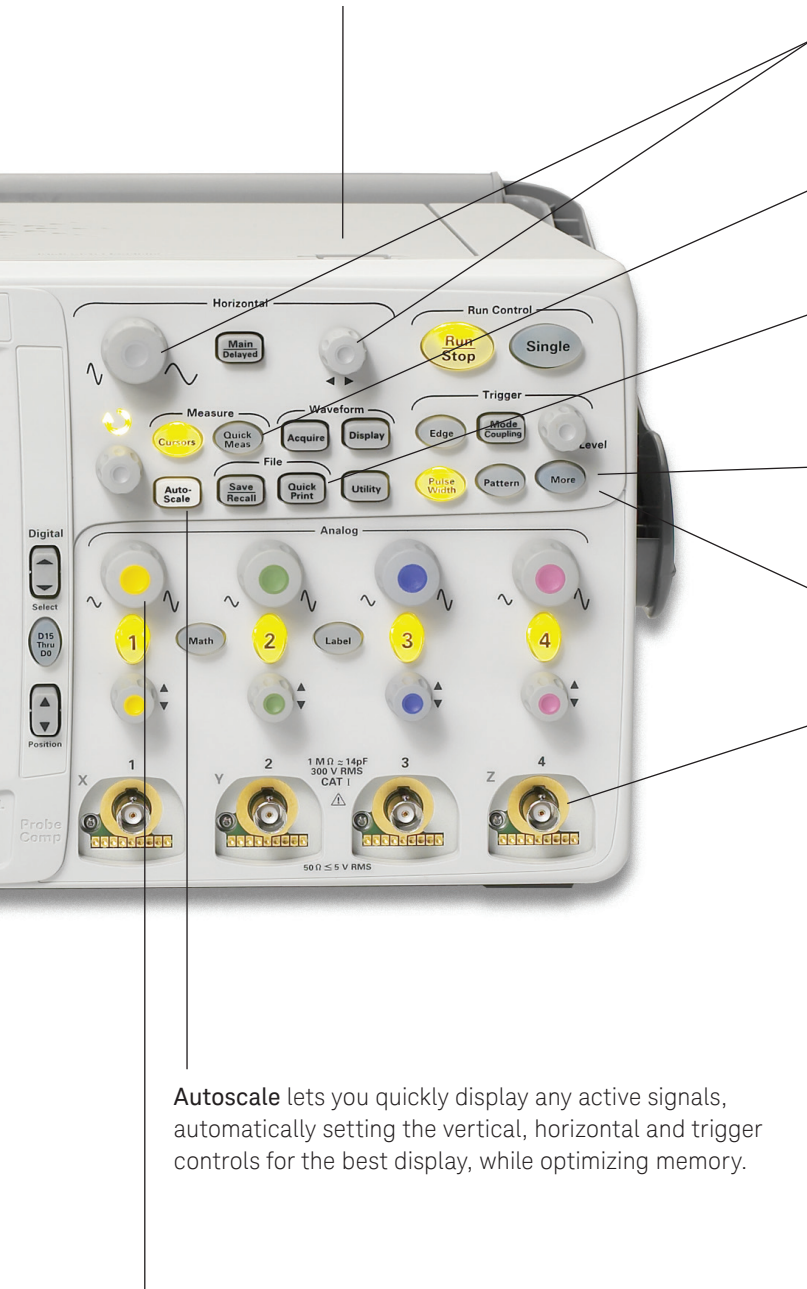

Autoscale lets you quickly display any active signals, automatically setting the vertical, horizontal and trigger controls for the best display, while optimizing memory.

Dedicated front-panel controls make it easy to access the most common scope controls, including vertical and horizontal scaling.

Quickly pan and zoom for analysis with MegaZoom III's instant response and optimum resolution.

QuickMeas shows up to four automated measurements with the push of a button.

QuickPrint automatically prints your screen or saves screen images to a connected USB storage device with automated file names.

Standard serial triggering includes I²C, SPI, and USB (optional CAN/LIN and FlexRay advanced triggering and decode).

Standard analog HDTV/EDTV triggering supports triggering on 1080i, 1080p, 720p, 480p HDTV/EDTV standards.

AutoProbe interface automatically configures the attenuation ratio of the probe and provides probe power for Keysight's active probes (available on 300 MHz to 1 GHz models only).

Built-in help in six languages. Simply press and hold the front-panel key of interest for a few seconds, and a help screen pops up to explain its function.

Maximum sample rate and resolution is achieved on every measurement. The scope automatically adjusts memory depth as you use it, so you get maximum sample rate and resolution on every measurement. You don't even have to think about it.

2 or 4 scope and 16 logic channel MSOs allow you to view and trigger on up to 20 time-aligned signals on your scope screen.

Accessories

Battery option (Option BAT – factory installed)

Keysight 6000 Series oscilloscopes provide an optional internal rechargeable lithium ion battery that will enable 2+ hours without line power. Specifically designed for applications where line power is not available or where you need to take your scope with you but you need more power than a handheld scopemeter provides. New oscilloscopes equipped with this option can also be operated off of the N5429A 12-V automotive adapter. The Keysight 6000 Series oscilloscopes offer the only high-performance scope with battery option on the market.

For more information:

www.keysight.com/find/6000_BAT




Evaluation kit (N2918A)

The scope evaluation kit for 6000 Series MSOs provides signals to help you experience the power of Keysight 6000 Series MSOs. The kit includes a variety of signals that demonstrate MegaZoom III technology with its fast deep memory, superior waveform update rate, high definition display and mixed analog, digital and serial signals debugging. Using this scope evaluation kit along with the easy-to-follow user's guide, you can quickly become familiar with how to effectively use an MSO.

Secure environment mode (Option SEC or N5427A)

Option SEC – secure environment mode provides the highest level of security by ensuring internal non-volatile memory is clear of all setup and trace settings in compliance with National Industrial Security Program Operation Manual (NISPOM) Chapter 8 requirements. When this option is installed, it will store setup and trace settings to internal volatile memory only. Volatile memory will be cleared during the power off cycle of the instrument. So you can move the instrument out of a secure area with confidence.

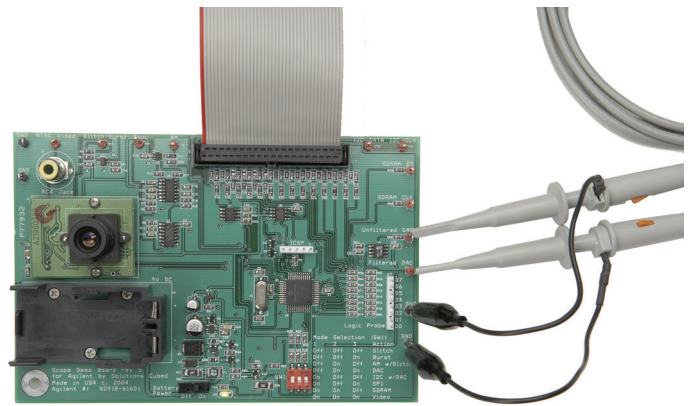

The N2918A evaluation helps you experience the power of Keysight 6000 MSO.

Performance Characteristics

Acquisition: Scope channels	
Sample rate	MSO/DSO601xA/603xA: 2 GSa/sec each channel
	MSO/DSO605xA/610xA: 4 GSa/sec half channel ¹ , 2 GSa/sec each channel
	Equivalent-time sample rate: 400 GSa/s (when real-time mode is turned off)
Standard 8 Mpts memory depth	With logic channels turned off, 8 Mpts half channel ¹ , 4 Mpts each channel
	With logic channels turned on, 5 Mpts half channel ¹ , 2.5 Mpts each channel
Vertical resolution	8 bits
Peak detection	MSO/DSO601xA: 1-ns peak detect
	MSO/DSO603xA: 500-ps peak detect
	MSO/DSO605xA/610xA: 250-ps peak detect
Averaging	Selectable from 2, 4, 8, 16, 32, 64 ... to 65536
High resolution mode	Average mode with avg = 1
	12 bits of resolution when $\geq 10 \mu\text{s}/\text{div}$ @ 4 GSa/s or $\geq 20 \mu\text{s}/\text{div}$ @ 2 GSa/s
Filter	Sinx/x interpolation (single shot BW = sample rate/4 or bandwidth of scope, whichever is less) with vectors on and in real-time mode
Acquisition: Logic channels (MSO6000A or MSO-upgraded DSO6000A only)	
Sample rate	2 GSa/sec one pod, 1 GSa/sec each pod
Maximum input frequency	250 MHz
Standard 8 Mpts memory depth	With scope channels turned off, 8 Mpts one pod, 4 Mpts each pod
	With scope channels turned on, 2.5 Mpts one pod, 1.25 Mpts each pod
Vertical resolution	1 bit
Glitch detection	2 ns (min pulse width)

1. Half channel is when only one of channel 1 or 2 is turned on, and only channel 3 or 4 is turned on.

Performance Characteristics (Continued)

Vertical system: Scope channels	
Scope channels	MSO/DSO6xx2A: Ch 1 and 2 simultaneous acquisition MSO/DSO6xx4A: Ch 1, 2, 3 and 4 simultaneous acquisition
Bandwidth (-3dB) ¹	MSO/DSO601xA: DC to 100 MHz MSO/DSO603xA: DC to 300 MHz MSO/DSO605xA: DC to 500 MHz MSO/DSO610xA: DC to 1 GHz
AC coupled	MSO/DSO601xA: 3.5 Hz to 100 MHz MSO/DSO603xA: 3.5 Hz to 300 MHz MSO/DSO605xA: 3.5 Hz to 500 MHz MSO/DSO610xA: 3.5 Hz to 1 GHz
Calculated rise time (=0.35/bandwidth)	MSO/DSO601xA: 3.5 nsec MSO/DSO603xA: 1.17 nsec MSO/DSO605xA: 700 psec MSO/DSO610xA: 350 psec
Single-shot bandwidth	MSO/DSO601xA: 100 MHz MSO/DSO603xA: 300 MHz MSO/DSO605xA: 500 MHz MSO/DSO610xA: 1 GHz (in half-channel mode)
Range ²	MSO/DSO601xA: 1 mV/div to 5 V/div (1 M Ω) MSO/DSO603xA and MSO/DSO605xA: 2 mV/div to 5 V/div (1 M Ω or 50 Ω) MSO/DSO610xA: 2 mV/div to 5 V/div (1 M Ω), 2 mV/div to 1 V/div (50 Ω)
Maximum input	CAT I 300 Vrms, 400 Vpk; transient overvoltage 1.6 kVpk CAT II 100 Vrms, 400 Vpk With 10073C or 10074C 10:1 probe: CAT I 500 Vpk, CAT II 400 Vpk
Offset range	± 5 V on ranges < 10 mV/div; ± 20 V on ranges 10 mV/div to 200 mV/div; ± 75 V on ranges > 200 mV/div
Dynamic range	± 8 div
Input impedance	MSO/DSO601xA: 1 M Ω $\pm$ 1% 11 pF MSO/DSO603xA/605xA/610xA: 1 M Ω $\pm$ 1% 14 pF or 50 Ω $\pm$ 1.5%, selectable
Coupling	AC, DC
BW limit	MSO/DSO601xA: 20 MHz selectable MSO/DSO603xA/605xA/610xA: 25 MHz selectable
Channel-to-channel isolation	DC to max bandwidth > 40 dB
Standard probes	MSO/DSO601xA: 10:1 10074C shipped standard for each scope channel MSO/DSO603xA/605xA/610xA: 10:1 10073C shipped standard for each scope channel
Probe ID	MSO/DSO601xA: Auto probe sense MSO/DSO603xA/605xA/610xA: Auto probe sense and AutoProbe interface Keysight- and Tektronix-compatible passive probe sense

1. Denotes warranted specifications, all others are typical. Specifications are valid after a 30-minute warm-up period and ± 10 °C from firmware calibration temperature.

2. Half channel is when only one of channel 1 or 2 is turned on, and only channel 3 or 4 is turned on.

Performance Characteristics (Continued)

Vertical system: scope channels (continued)	
ESD tolerance	± 2 kV
Noise peak-to-peak	MSO/DSO601xA: 3% full scale or 2 mV, whichever is greater MSO/DSO603xA: 3% full scale or 3 mV, whichever is greater MSO/DSO605xA: 3% full scale or 3.6 mV, whichever is greater MSO/DSO610xA: 3% full scale or 4 mV, whichever is greater
DC vertical gain accuracy ^{1,2}	± 2.0% full scale
DC vertical offset accuracy	≤ 200 mV/div: ± 0.1 div ± 2.0 mV ± 0.5% offset value > 200 mV/div: ± 0.1 div ± 2.0 mV ± 1.5% offset value
Single cursor accuracy ¹	± {DC vertical gain accuracy + DC vertical offset accuracy + 0.2% full scale (~1/2 LSB)} Example: For 50 mV signal, scope set to 10 mV/div (80 mV full scale), 5 mV offset, accuracy = ± {2.0% (80 mV) + 0.1 (10 mV) + 2.0 mV + 0.5% (5 mV) + 0.2% (80 mV)} = ± 4.785 mV
Dual cursor accuracy ^{1,2}	± {DC vertical gain accuracy + 0.4% full scale (~1 LSB)} Example: For 50 mV signal, scope set to 10 mV/div (80 mV full scale), 5 mV offset, accuracy = ± {2.0% (80 mV) + 0.4% (80 mV)} = ± 1.92 mV

1. Denotes warranted specifications, all others are typical. Specifications are valid after a 30-minute warm-up period and ± 10 °C from firmware calibration temperature.
2. 1 mV/div is a magnification of 2 mV/div setting for 100 MHz models and 2 mV/div is a magnification of 4 mV/div setting for 300 MHz to 1 GHz models. For vertical accuracy calculations, use full scale of 16 mV for 1 mV/div sensitivity setting and 32 mV for 2 mV/div sensitivity setting.

Vertical system: Logic channels (MSO6000A or MSO-upgraded DSO6000A only)	
Number of channels	16 logic timing channels – labeled D15 - D0
Threshold groupings	Pod 1: D7 - D0 Pod 2: D15 - D8
Threshold selections	TTL, CMOS, ECL and user-definable (selectable by pod)
User-defined threshold range	± 8.0 V in 10 mV increments
Maximum input voltage	± 40 V peak CAT I; transient overvoltage 800 Vpk
Threshold accuracy ¹	± (100 mV + 3% of threshold setting)
Input dynamic range	± 10 V about threshold
Minimum input voltage swing	500 mV peak-to-peak
Input capacitance	~8 pF
Input resistance	100 kΩ ± 2% at probe tip
Channel-to-channel skew	2 ns typical, 3 ns maximum

1. Denotes warranted specifications, all others are typical. Specifications are valid after a 30-minute warm-up period and ± 10 °C from firmware calibration temperature.

Performance Characteristics (Continued)

Horizontal	
Range	MSO/DSO601xA: 5 nsec/div to 50 sec/div
	MSO/DSO603xA: 2 nsec/div to 50 sec/div
	MSO/DSO605xA: 1 nsec/div to 50 sec/div
	MSO/DSO610xA: 500 psec/div to 50 sec/div
Resolution	2.5 psec
Time base accuracy	$\pm (15 + 2 \times (\text{instrument age in years})) \text{ ppm}$
Vernier	1-2-5 increments when off, ~25 minor increments between major settings when on
Delay range	Pre-trigger (negative delay): Greater of 1 screen width or 1 ms
	Post-trigger (positive delay): 1 s to 500 seconds
Analog delta-t accuracy	Same channel: $\pm 0.0015\%$ reading $\pm 0.1\%$ screen width $\pm 20 \text{ ps}$
	Channel-to-channel: $\pm 0.0015\%$ reading $\pm 0.1\%$ screen width $\pm 40 \text{ ps}$
	Same channel example (MSO/DSO605xA): For signal with pulse width of $10 \mu\text{s}$, scope set to $5 \mu\text{s}/\text{div}$ ($50 \mu\text{s}$ screen width), delta-t accuracy = $\pm \{0.0015\% (10 \mu\text{s}) + 0.1\% (50 \mu\text{s}) + 20 \text{ ps}\} = 50.17 \text{ ns}$
Logic delta-t accuracy	Same channel: $\pm 0.005\%$ reading $\pm 0.1\%$ screen width $\pm (1 \text{ logic sample period}, 1 \text{ ns})$
	Channel-to-channel: $\pm 0.005\%$ reading $\pm 0.1\%$ screen width $\pm (1 \text{ logic sample period}) \pm \text{chan-to-chan skew}$
	Same channel example: For signal with pulse width of $10 \mu\text{s}$, scope set to $5 \mu\text{s}/\text{div}$ ($50 \mu\text{s}$ screen width), delta-t accuracy = $\pm \{0.005\% (10 \mu\text{s}) + 0.1\% (50 \mu\text{s}) + 1 \text{ ns}\} = 51.5 \text{ ns}$
Modes	Main, delayed, roll, XY
XY	Bandwidth: Max bandwidth
	Phase error @ 1 MHz: $< 0.5 \text{ degrees}$
	Z blanking: 1.4 V blanks trace (use external trigger on MSO/DSO6xx2A, channel 4 on MSO/DSO6xx4A)
Reference positions	Left, center, right
Trigger system	
Sources	MSO6xx2A: Ch 1, 2, line, ext, D15 - D0
	DSO6xx2A: Ch 1, 2, line, ext
	MSO6xx4A: Ch 1, 2, 3, 4, line, ext, D15 - D0
	DSO6xx4A: Ch 1, 2, 3, 4, line, ext
Modes	Auto, normal (triggered), single
Holdoff time	~60 ns to 10 seconds
Trigger jitter	15 ps rms

Performance Characteristics (Continued)

Trigger system (Continued)	
Selections	Edge, pulse width, pattern, TV, duration, sequence, CAN, LIN, FlexRay, USB, I ² C, SPI, Nth edge burst
Edge	Trigger on a rising, falling, alternating or either edge of any source
Pattern	Trigger at the beginning of a pattern of high, low, and don't care levels and/or a rising or falling edge established across any of the analog and digital channels, but only after a pattern has stabilized for a minimum of 2 nsec. The scope channel's high or low level is defined by that channel's trigger level. The logic channel's trigger level is defined by the threshold for the pod, 0 to 7 or 8 to 15.
Pulse width	Trigger when a positive- or negative-going pulse is less than, greater than, or within a specified range on any of the source channels. Minimum pulse width setting: – 5 ns (MSO/DSO601xA/603xA scope channels) – 2 ns (MSO/DSO605xA/610xA scope channels) – 2 ns (logic channels on MSO6000A or – MSO-upgraded DSO6000A) Maximum pulse width setting: 10 s
TV	Trigger using any scope channel on most analog progressive and interlaced video standards including HDTV/EDTV, NTSC, PAL, PAL-M or SECAM broadcast standards. Select either positive or negative sync pulse polarity. Modes supported include Field 1, Field 2, all fields, all lines, or any line within a field. TV trigger sensitivity: 0.5 division of sync signal. Trigger holdoff time can be adjusted in half field increments.
Sequence	Arm on event A, trigger on event B, with option to reset on event C or time delay.
CAN	Trigger on CAN (Controller Area Network) version 2.0A and 2.0B signals. Trigger on the start of frame (SOF) bit (standard). N5424A option supports triggering on remote frame ID (RTR), data frame ID (~RTR), remote or data frame ID, data frame ID and data, error frame, all errors, acknowledge error and overload frame.
LIN	Trigger on LIN (Local Interconnect Network) sync break at beginning of message frame (standard). N5424A option supports triggering on frame ID.
FlexRay	N5432A option supports trigger on FlexRay frame ID or time slot or specific error condition, along with cycle-base and repetition-cycle filtering.
USB	Trigger on USB (Universal Serial Bus) start of packet, end of packet, reset complete, enter suspend, or exit suspend on the differential USB data lines. USB low speed and full speed are supported.
I ² C	Trigger on I ² C (Inter-IC bus) serial protocol at a start/stop condition or user defined frame with address and/or data values. Also trigger on missing acknowledge, address with no acq, restart, EEPROM read, and 10-bit write.
SPI	Trigger on SPI (Serial Protocol Interface) data pattern during a specific framing period. Supports positive and negative Chip Select framing as well as clock Idle framing and user-specified number of bits per frame.
Duration	Trigger on a multi-channel pattern whose time duration is less than a value, greater than a value, greater than a time value with a timeout, or inside or outside of a set of time values. Minimum duration setting: 2 ns Maximum duration setting: 10 s
Nth edge burst	Trigger on the Nth edge of a burst that occurs after an idle time that you specify. Max edge count: 65,536.

Performance Characteristics (Continued)

Trigger system (Continued)		
Autoscale	Finds and displays all active scope and logic (for MSO6000A series MSO) channels, sets edge trigger mode on highest-numbered channel, sets vertical sensitivity on scope channels and thresholds on logic channels, time base to display ~1.8 periods. Requires minimum voltage > 10 mVpp, 0.5% duty cycle and minimum frequency > 50 Hz.	
Scope channel triggering		
Range (internal)	± 6 div from center screen	
Sensitivity ¹	< 10 mV/div: greater of 1 div or 5 mV; ≥ 10 mV/div: 0.6 div	
Coupling	AC (~3.5 Hz on MSO/DSO601xA, ~10 Hz on MSO/DSO603xA/605xA/610xA), DC, noise reject, HF reject and LF reject (~50 kHz)	
Logic (D15 - D0) channel triggering (MSO6000A or MSO-upgraded DSO6000A only)		
Threshold range (user defined)	± 8.0 V in 10 mV increments	
Threshold accuracy ¹	± (100 mV + 3% of threshold setting)	
Predefined thresholds	TTL = 1.4 V, CMOS = 2.5 V, ECL = -1.3 V	
External (EXT) triggering	MSO/DSO6xx2A (2-/2+16-ch models)	MSO/DSO6xx4A (4-/4+16-ch models)
Input impedance	MSO/DSO6012A: 1 MΩ ± 3% 11 pF or 50 Ω	MSO/DSO6014A: 1.015 kΩ ± 5%
	MSO/DSO6032A/6052A/6102A: 1 MΩ ± 3% 14 pF or 50 Ω	MSO/DSO6034A/6054A/6104A: 2.14 kΩ ± 5%
Maximum input	CAT I 300 Vrms, 400 Vpk, CAT II 100 Vrms, 400 Vpk	± 15 V
	With 10073C 10:1 probe: CAT I 500 Vpk, CAT II 400 Vpk	
	5 Vrms with 50-Ω input	
Range	DC coupling: trigger level ± 1 V and ± 8 V	± 5 V
Sensitivity	For ± 1 V range setting: DC to 100 MHz, 100 mV;	MSO/DSO6014A: DC to 100 MHz: 500 mV
	MSO/DSO6032A/6052A/6102A: > 100 MHz to bandwidth of oscilloscope: 200 mV	MSO/DSO6034A/6054A/6104A: DC to 500 MHz: 500 mV
	For ± 8 V range setting: DC to 100 MHz, 250 mV	
	MSO/DSO6032A/6052A/6102A: > 100 MHz to bandwidth of oscilloscope: 500 mV	
Coupling	AC (~3.5 Hz), DC, noise reject, HF reject and LF reject (~50 kHz)	
Probe ID	MSO/DSO601xA: Auto probe sense	
	MSO/DSO603xA/605xA/610xA: Auto probe sense and AutoProbe interface	
	Keysight- and Tektronix-compatible passive probe sense	

1. Denotes warranted specifications, all others are typical. Specifications are valid after a 30-minute warm-up period and ±10 °C from firmware calibration temperature.

Performance Characteristics (Continued)

Display system	
Display	6.3-inch (161 mm) diagonal color TFT LCD
Throughput of scope channels	Up to 100,000 waveforms/sec in real-time mode
Resolution	XGA – 768 vertical by 1024 horizontal points (screen area)
	640 vertical by 1000 horizontal points (waveform area)
	256 levels of intensity scale
Controls	Waveform intensity on front panel. Vectors on/off; infinite persistence on/off, 8 x 10 grid with intensity control
Built-in help system	Key-specific help (in English) displayed by pressing and holding key or softkey of interest
Real-time clock	Time and date (user adjustable)
Measurement features	
Automatic measurements	Measurements are continuously updated. Cursors track last selected measurement. Up to four measurements can be displayed on screen at any one time.
Voltage (scope channels only)	Peak-to-peak, maximum, minimum, average, amplitude, top, base, overshoot, preshoot, RMS, standard deviation (AC RMS)
Time	Peak-to-peak, maximum, minimum, average, amplitude, top, base, overshoot, preshoot, RMS, standard deviation (AC RMS)
Counter	Built-in 5-digit frequency counter on any channel. Counts up to the scope's bandwidth (1 GHz max). The counter resolution can be increased to 8 digits with an external 10-MHz reference.
Threshold definition	Variable by percent and absolute value; 10%, 50%, 90% default for time measurements
Cursors	Manually or automatically placed readout of Horizontal (X, ΔX , $1/\Delta X$) and Vertical (Y, ΔY). Additionally logic or scope channels can be displayed as binary or hex values.
Waveform math	One function of 1-2, 1x2, FFT, differentiate, integrate.
	Source of FFT, differentiate, integrate: scope channels 1 or 2, 1-2, 1+2, 1x2.
FFT	
Points	Fixed at 1000 points
Source of FFT	Scope channels 1 or 2 (or 3 or 4 on MSO/DSO6xx4A only), 1+2, 1-2, 1*2
Window	Rectangular, flattop, hanning
Noise floor	-50 to -90 dB depending on averaging
Amplitude	Display in dBV, dBm at 50 Ω
Frequency resolution	0.05/time per div
Maximum frequency	50/time per div

Performance Characteristics (Continued)

Storage	
Save/recall (non-volatile)	10 setups and traces can be saved and recalled internally. Optional secure environment mode ensures setups and traces are stored to internal volatile memory so data is erased when power is removed. Compliant to NISPOM Chapter 8 requirements.
Storage type and format	USB 1.1 host ports on front and rear panels Image formats: BMP (8-bit), BMP (24-bit), PNG (24-bit) Data formats: X and Y (time/voltage) values in CSV format, ASCII XY and binary format Trace/setup formats: Recalled
I/O	
Standard ports	USB 2.0 high speed device, two USB 1.1 host ports, 10/100-BaseT LAN, IEEE488.2 GPIB, XGA video output
Max transfer rate	IEEE488.2 GPIB: 500 kbytes/sec USB (USBTMC-USB488): 3.5 Mbytes/sec 100 Mbps LAN (TCP/IP): 1 Mbytes/sec
General characteristics	
Physical size	35.4 cm wide x 18.8 cm high x 28.2 cm deep (without handle) 39.9 cm wide x 18.8 cm high x 28.2 cm deep (with handle)
Weight	Net: 4.9 kgs (10.8 lbs) Shipping: 9.4 kgs (20.7 lbs)
Probe comp output	Frequency ~2 kHz; Amplitude ~5 V
Trigger out	When triggers is selected (delay ~17 ns) – 0 to 5 V into high impedance – 0 to 2.5 V into 50 Ω When source frequency or source frequency/8 ¹ is selected – 0 to 580 mV into high impedance – 0 to 290 mV into 50 Ω Max frequency output – 350 MHz (in source frequency mode when terminated in 50 Ω) – 125 MHz (in source frequency/8 mode when terminated in 50 Ω)
10 MHz ref in/out	TTL out, 180 mV to 1 V amplitude with 0 to 2 V offset
Kensington lock	Connection on rear panel for security

1. Source Frequency/8 is supported on 300 MHz to 1 GHz 6000 Series only.

Performance Characteristics (Continued)

Power requirements	
Line voltage range	~Line 120 W max, 96 to 144 V/48 to 440 Hz, 192 to 288 V/48 to 66 Hz, automatic selection
Line frequency	50/60 Hz, 100 to 240 VAC; 440 Hz, 100 to 132 VAC
Power usage	110 W max
Battery option – BAT	2+ hours between charges, battery-low indicator at 20%
	Battery capacity after repeated charging: 80% after 300 cycles
Environmental characteristics	
Ambient temperature	Operating –10 °C to +55 °C; non-operating –51 °C to +71 °C
Humidity	Operating 95% RH at 40 °C for 24 hr; non-operating 90% RH at 65 °C for 24 hr
Altitude	Operating to 4,570 m (15,000 ft); non-operating to 15,244 m (50,000 ft)
Vibration	Keysight class B1 and MIL-PRF-28800F; class 3 random
Shock	Keysight class B1 and MIL-PRF-28800F; class 3 random; (operating 30g, 1/2 sine, 11 ms duration, 3 shocks/axis along major axis, total of 18 shocks)
Pollution degree2	Normally only dry non-conductive pollution occurs
	Occasionally a temporary conductivity caused by condensation must be expected
Indoor use	Rated for indoor use only
Other	
Measurement categories	CAT I: Mains isolated
	CAT II: Line voltage in appliance and to wall outlet
Regulatory information	Safety IEC 61010-1:2001 / EN 61010-1:2001
	Canada: CSA C22.2 No. 1010.1:1992
	UL 61010B-1:2003
Supplementary information	The product herewith complies with the requirements of the Low Voltage Directive 73/23/EEC and the EMC Directive 89/336/EEC, and carries the CE-marking accordingly
	The product was tested in a typical configuration with HP/Keysight test systems

Ordering Information

Model	Bandwidth	Maximum sample rate	Memory depth	Scope channels	Logic channels
DSO6012A	100 MHz	2 GSa/s	8 Mpts	2	
MSO6012A	100 MHz	2 GSa/s	8 Mpts	2	16
DSO6014A	100 MHz	2 GSa/s	8 Mpts	4	
MSO6014A	100 MHz	2 GSa/s	8 Mpts	4	16
DSO6032A	300 MHz	2 GSa/s	8 Mpts	2	
MSO6032A	300 MHz	2 GSa/s	8 Mpts	2	16
DSO6034A	300 MHz	2 GSa/s	8 Mpts	4	
MSO6034A	300 MHz	2 GSa/s	8 Mpts	4	16
DSO6052A	500 MHz	4 GSa/s	8 Mpts	2	
MSO6052A	500 MHz	4 GSa/s	8 Mpts	2	16
DSO6054A	500 MHz	4 GSa/s	8 Mpts	4	
MSO6054A	500 MHz	4 GSa/s	8 Mpts	4	16
DSO6102A	1 GHz	4 GSa/s	8 Mpts	2	
MSO6102A	1 GHz	4 GSa/s	8 Mpts	2	16
DSO6104A	1 GHz	4 GSa/s	8 Mpts	4	
MSO6104A	1 GHz	4 GSa/s	8 Mpts	4	16

Accessories included:

Model number	DSO600xA	MSO600xA
User's guide (localized), Service guide, Programmer's guide	●	●
Power cord	●	●
10073C 10:1 divider passive probe with readout per scope channel	●	●
Front panel cover	●	●
Accessories storage	●	●
Keysight I/O libraries suite 14.2	●	●
16 channel flying lead set logic probe (two pods with eight channels each)		●

Note: IntuiLink Data Capture software available free on web at www.keysight.com/find/intuilink

Ordering Information (Continued)

Product upgrades

	DSO601xA MSO601xA DSO603xA MSO603xA	DSO605xA MSO605xA	DSO610xA MSO610xA
DSO to MSO upgrade kit (User installed, typically ordered after initial scope purchase)	N2914A ¹	N2915A ¹	N2915A ¹
Rechargeable battery option (Factory installed at time of initial scope purchase)	Option BAT	Option Bat	Option BAT
Secure environment mode option (Factory installed at time of initial scope purchase)	Option SEC	Option SEC	Option SEC
Secure environment option (User installed, can be installed by Keysight service center for an additional charge)	N5427A	N5427A	N5427A

1. Includes a 54620-68701 logic cable kit, a label and an upgrade license to activate the MSO features.

Digital analysis applications

Option number - user installed	Option number - factory installed	Description
N5406A		FPGA dynamic probe for Xilinx (MSO models only)
N5434A		FPGA dynamic probe for Altera (MSO models only)

Serial data analysis applications

Option number - user installed	Option number - factory installed	Description
N5424A	AMS	CAN/LIN automotive triggering and decode (4 and 4+16 channel models only)
N5423A	LSS	I ² C/SPI serial decode option (for 4/4+16 channel models only)
N5432A	FRS	FlexRay automotive triggering and decode (4 and 4+16 channel models only)

Ordering Information (Continued)

Related literature

Publication title	Publication number
InfiniiVision Oscilloscope Probes and Accessories - Selection Guide	5968-8153EN/EUS
N5397A FPGA Dynamic Probe for Xilinx-SE - Data Sheet	5989-1848EN
Oscilloscope Display Quality Impacts Ability to View Subtle Signal Details - Application Note	5989-2003EN
Evaluating Oscilloscope Vertical Noise Characteristics - Application Note	5989-3020EN
Evaluating Oscilloscopes to Debug Mixed-Signal Designs - Application Note	5989-3702EN
Using an 6000 Series MSO To Debug an Automotive CAN Bus - Application Note	5989-5049EN
I²C and SPI Triggering and Hardware-based Decode for InfiniiVision Series Oscilloscopes - Data Sheet	5989-5126EN
8000 Series Oscilloscopes - The Best Combination of Signal Viewing and Analysis - Brochure	5989-5806EN
InfiniiVision MSO Dynamic Probe for Xilinx FPGAs (N5406A and DSOX4FPGAX, and DSOX6FPGAX) - Data Sheet	5989-5965EN
Oscilloscope Probes and Accessories - Selection Guide	5989-6162EN
Oscilloscope Waveform Update Rate Determines Ability to Capture Elusive Events - Application Note	5989-7885EN



www.axistandard.org

AdvancedTCA® Extensions for Instrumentation and Test (AXIe) is an open standard that extends the AdvancedTCA for general purpose and semiconductor test. Keysight is a founding member of the AXIe consortium. ATCA®, AdvancedTCA®, and the ATCA logo are registered US trademarks of the PCI Industrial Computer Manufacturers Group.



www.lxistandard.org

LAN eXtensions for Instruments puts the power of Ethernet and the Web inside your test systems. Keysight is a founding member of the LXI consortium.





www.pxisa.org

PCI eXtensions for Instrumentation (PXI) modular instrumentation delivers a rugged, PC-based high-performance measurement and automation system.

Evolving Since 1939

Our unique combination of hardware, software, services, and people can help you reach your next breakthrough. We are unlocking the future of technology.

From Hewlett-Packard to Agilent to Keysight.



myKeysight

myKeysight

www.keysight.com/find/mykeysight

A personalized view into the information most relevant to you.

http://www.keysight.com/find/emt_product_registration

Register your products to get up-to-date product information and find warranty information.

KEYSIGHT SERVICES

Accelerate Technology Adoption.
Lower costs.

Keysight Services

www.keysight.com/find/service

Keysight Services can help from acquisition to renewal across your instrument's lifecycle. Our comprehensive service offerings—one-stop calibration, repair, asset management, technology refresh, consulting, training and more—helps you improve product quality and lower costs.



Keysight Assurance Plans

www.keysight.com/find/AssurancePlans

Up to ten years of protection and no budgetary surprises to ensure your instruments are operating to specification, so you can rely on accurate measurements.

Keysight Channel Partners

www.keysight.com/find/channelpartners

Get the best of both worlds: Keysight's measurement expertise and product breadth, combined with channel partner convenience.

For more information on Keysight Technologies' products, applications or services, please contact your local Keysight office. The complete list is available at:

www.keysight.com/find/contactus

Americas

Canada	(877) 894 4414
Brazil	55 11 3351 7010
Mexico	001 800 254 2440
United States	(800) 829 4444

Asia Pacific

Australia	1 800 629 485
China	800 810 0189
Hong Kong	800 938 693
India	1 800 11 2626
Japan	0120 (421) 345
Korea	080 769 0800
Malaysia	1 800 888 848
Singapore	1 800 375 8100
Taiwan	0800 047 866
Other AP Countries	(65) 6375 8100

Europe & Middle East

Austria	0800 001122
Belgium	0800 58580
Finland	0800 523252
France	0805 980333
Germany	0800 6270999
Ireland	1800 832700
Israel	1 809 343051
Italy	800 599100
Luxembourg	+32 800 58580
Netherlands	0800 0233200
Russia	8800 5009286
Spain	800 000154
Sweden	0200 882255
Switzerland	0800 805353
	Opt. 1 (DE)
	Opt. 2 (FR)
	Opt. 3 (IT)
United Kingdom	0800 0260637

For other unlisted countries:

www.keysight.com/find/contactus
(BP-9-7-17)

DEKRA Certified
ISO 9001 Quality Management System

www.keysight.com/go/quality

Keysight Technologies, Inc.
DEKRA Certified ISO 9001:2015
Quality Management System



This information is subject to change without notice.
© Keysight Technologies, 2017
Published in USA, December 1, 2017
5989-2000EN
www.keysight.com