



Agilent 909A Coaxial Termination DC to 18 GHz



Technical Overview

Key Features

- Broadband load with low RF leakage ensures excellent measurement accuracy.
- Low reflection of 0.11 at 18 GHz minimizes loss.

The Agilent 909A coaxial termination is a low-reflection load for terminating 50 Ω coaxial systems in their characteristic impedance. This termination is widely used for broadband instrument measurement and for coaxial instrumentation from DC to 18 GHz.

The Agilent 909A is furnished with an Amphenol precision 7 mm connector (APC-7). This is a broadband connector with low RF leakage and a clearly defined reference plane. In addition, the connector is sexless, so any pair mates without an adapter. As an option, the Agilent 909A can be supplied with a type-N connector, either male or female, compatible with MIL-C-39012. These connectors mate with all styles of type-N connectors and are made of stainless steel for durability.

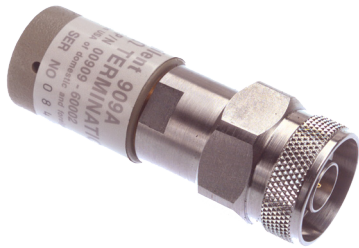

Specifications:

Specifications describe the product's warranted performance. Supplemental and typical characteristics are intended to provide typical but non-warranted performance parameters. These are denoted as "typical", "nominal" or "approximate".

Model Number	909A
Frequency range	DC to 18 GHz
Impedance	50 Ω
Connectors	Option 701 Precision 7 mm (APC-7) Option 012 Type N (male) Option 013 Type N (female)
Reflection coefficient	Option 701 <ul style="list-style-type: none"> • DC to 4 GHz: 0.024 (1.05 SWR) • 4 to 12.4 GHz: 0.048 (1.10 SWR) • 12.4 to 18 GHz: 0.110 (1.25 SWR) Option 012 and 013 <ul style="list-style-type: none"> • DC to 4 GHz: 0.029 (1.06 SWR) • 4 to 12.4 GHz: 0.052 (1.11 SWR) • 12.4 to 18 GHz: 0.130 (1.30 SWR)
Power rating	2 W average 300 W peak



Environmental Specifications:

Agilent 909A is designed to fully comply with Agilent Technologies' product operating environment specifications. The following are the summarized environmental specifications for this product.

Parameter	Required Values/Ranges
Temperature <ul style="list-style-type: none">• Operation• Storage	+15 °C to +35 °C (+59 °F to +95 °F) -40 °C to +75 °C (-40 °F to +167 °F)
Altitude <ul style="list-style-type: none">• Operation• Storage	< 4,500 m (15,000 ft) < 15,000 m (50,000 ft)
Relative humidity <ul style="list-style-type: none">• Operation• Storage	Always non-condensing 0 % to 80 % (26 °C maximum dry bulb) 0 % to 95 %
Vibration	0.015", 5-55-5 Hz, 15 min, 3 axes
Shock	100 g, 1-2 ms, 3 times each plane

Ordering Information:

909A DC to 18 GHz coaxial terminations

- Option 701 Precision 7 mm (APC-7) connector
- Option 012 Type N (male) connector
- Option 013 Type N (female) connector



Agilent Email Updates

www.agilent.com/find/emailupdates

Get the latest information on the products and applications you select.



www.lxistandard.org

LAN eXtensions for Instruments puts the power of Ethernet and the Web inside your test systems. Agilent is a founding member of the LXI consortium.

Agilent Channel Partners

www.agilent.com/find/channelpartners

Get the best of both worlds: Agilent's measurement expertise and product breadth, combined with channel partner convenience.



Agilent Advantage Services is committed to your success throughout your equipment's lifetime. To keep you competitive, we continually invest in tools and processes that speed up calibration and repair and reduce your cost of ownership. You can also use Infoline Web Services to manage equipment and services more effectively. By sharing our measurement and service expertise, we help you create the products that change our world.

www.agilent.com/find/advantageservices



www.agilent.com/quality

www.agilent.com

www.agilent.com/find/mta

For more information on Agilent Technologies' products, applications or services, please contact your local Agilent office. The complete list is available at:

www.agilent.com/find/contactus

Product specifications and descriptions in this document subject to change without notice.

© Agilent Technologies, Inc. 2011
Published in USA, June 27, 2011
5990-8462EN



Agilent Technologies